


ViewSonic® VIEWBOARDS ViewBoard Mini IFP2410

Toets Features

- Android 8.1 embedded OS
- myViewBoard™ digital whiteboard software
- ViewBoard® Cast Content Sharing Software
- HDMI output naar extern display
- Interactief 'front-facing' lesgeven en samenwerken



Product Omschrijving

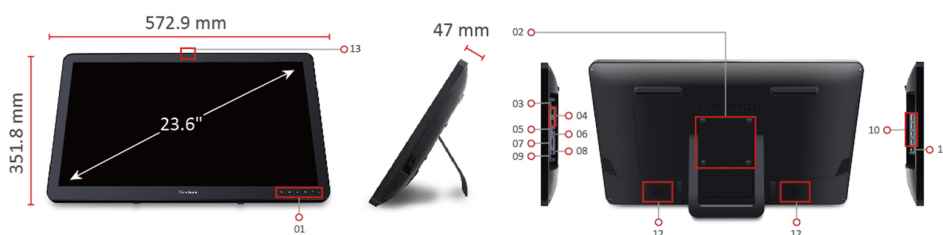

- | | |
|--|-----------------------|
| 1. Menu Controls | 7. SD Card Reader |
| 2. VESA Compatible (Wall Mount 100 x 100 mm) | 8. Mini USB |
| 3. LAN | 9. DC Power In |
| 4. HDMI/MHL In/Out | 10. USB 2.0 x 4 |
| 5. Audio In | 11. USB Type-B |
| 6. Headphone | 12. Internal Speakers |

Bezoek Gebruikers  www.viewsonic.com

DISPLAY

Paneelgrootte:	23.6"
Type/Tech:	TFT liquid crystal display
Weergavegebied (mm):	544.8(H) x 320.5 (V) (23.6" diagonal)
Aspectratio:	16:9
Native resolutie:	1920 x 1080
Helderheid:	250 nits (typ.)
Contrastverhouding:	3000:1 Typ.
Kijkhoeken:	H = 178, V = 178 typ.
Levensduur achtergrondverlichting:	40,000 Hours Typ.
Oriëntatie:	Landscape

PLATFORM

Processor:	ARM based SoC
RAM:	2GB DDR3
Opslag:	16GB EMMC iNand

TOUCH

Type:	PCAP touch technology
Touch punt:	10 points touch, 10 points writing

INPUT

HDMI:	x1
Audio:	x1 PC audio(3.5 mm)
SD/SDHC:	Yes

OUTPUT

HDMI:	x1
-------	----

LAN

RJ45:	x1
-------	----

USB

Type A:	USB 2.0 x4
Type B:	x1 for touch
Mini USB:	x1 (For OTG)

CAMERA

Secondary Camera (Front):	View Angle Free (R/L 178 – Typ.)
Reactietijd:	5.0MP Autofocus

SPEAKERS

SPEAKERS:	2.5Wx2
-----------	--------

COMPATIBILITY

HDMI:	480i, 480p,720p,1080i,1080p
-------	-----------------------------

INGESLOTEN BESTURINGSSYSTEEM

Ingesloten besturingssysteem:	Android 8.1
-------------------------------	-------------

USB-ONDERSTEUNDE BESTANDSFORMAAT

USB-ONDERSTEUNDE BESTANDSFORMAAT:	Text: TXT/JPEG/BMP/ GIF (non-animated) Picture: AVI/RM/ RMVB/ MOV/ FLV/ 3GP/ MP4/MKV Video: Multi Format Codec provides encoding and decoding of MPEG-4/H.263/H.264 up to 1080p@30fps and decoding of MPEG-2/VC1 video up to 1080p@30 fps Audio: AAC/ APE/ WMA/ MP3/ OGG/ WAV/ FLAC
-----------------------------------	--

BUNDELSOFTWARE

Basis annotatiesoftware:	myViewboard for Android
Draadloze presentatie met Touch Feedback: Viewboard Cast:	vCastReceiver

STROOM

Spanning:	100-240 VAC +/- 10% Wide Range, 50-60Hz +/-3 Hz
Consumptie:	35W (typ), 40W (max) < 0.5W ("Off")

ERGONOMICS

Wandmontage (VESA®):	100 x 100
----------------------	-----------

OPERATING CONDITIONS

Temperatuur (° C):	5°C to 40°C (Landscape only)
Luchtvochtigheid:	20% ~ 90% non-condensing

AFMETINGEN (B X H X D)

Fysiek (mm):	572.9 x 351.8 x 47mm
Verpakking (mm):	643 x 435 x 140 mm

WEIGHT

Netto (kg):	5.64 kg
Bruto (kg):	7.56 Kg

REGULATIONS

REGULATIONS:	FCC, cUTVus, FCC-ID, IC-ID, CE, CB, R&TTE, RoHS, ErP, WEEE
--------------	--

VERPAKKINGSINHOUD

VERPAKKINGSINHOUD:	1. IFP2410 2. Power adapter 3. Power cord (depend on regions.)* 4. Quick Start Guide *Applicable power cord is shipped with the product to the point of destination. (VSA: US ; VSE: EU+UK ; VSCN: CN)
--------------------	--